


PORTABLE TEMPERATURE DRY BLOCK CALIBRATORS (MEDIUM TEMPERATURE TYPE)

- Used for temperature calibration in industrial or laboratory
- Unit: °F, °C
- Language: English, Chinese
- Overheat protection
- Multi-point temperature correction function
- Automatic tuning of temperature control parameters
- Segmented PID control, one-button heating, full-automatic temperature control

soaking block (included), can be customized

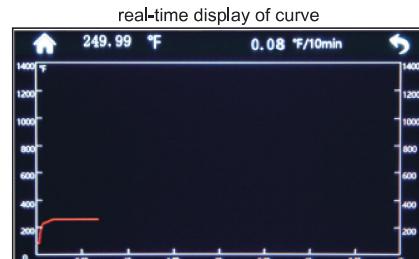

SPECIFICATION

Part No.	DBC-M660A-U	DBC-M660B-U
Temperature range	122°F~1220°F	
Temperature resolution	.01°F	
Temperature fluctuation	±.36°F	±.18°F
Radial uniformity	≤.54°F	≤.27°F
Soaking block	insertion aperture: .18"DIA, .26"DIA, .32"DIA, .39"DIA can be customized	
Depth	well depth: 6.69", hole depth: 6.10"	
Control method	touch screen	
Power	650W	
Power supply	110V/60Hz	
Dimension (L×W×H)	11.2×6.69×13.2"	
Net weight	20.7lb	

STANDARD DELIVERY

Main unit	1pc
Soaking block	1pc