


DOUBLE-NEEDLE DIAL TENSION GAGES

- Clockwise and counter-clockwise use
- Suitable for measuring relay contact pressure, micro switch pressure, valve pressure, precision spring pressure, etc.
- Dual-needle peak mode, data hold, convenient for reading

INSIZE
CERTIFICATE

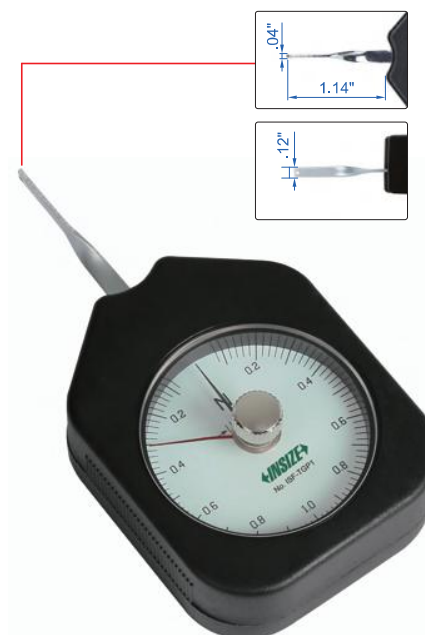

ISF-TGP1

SPECIFICATION (Unit: N)

Part No.	ISF-TGP1	ISF-TGP1D5	ISF-TGP3	ISF-TGP5
Range	0.1~1N	0.15~1.5N	0.3~3N	0.5~5N
Graduation	0.02N	0.025N	0.05N	0.1N
Accuracy	±3%FS			
Dimension (L×W×H)	3.54×1.85×.75"			
Weight	0.13lb			

SPECIFICATION (Unit: gf)

Part No.	ISF-TGP100	ISF-TGP150	ISF-TGP300	ISF-TGP500
Range	10~100gf	15~150gf	30~300gf	50~500gf
Graduation	2gf	2.5gf	5gf	10gf
Accuracy	±3%FS			
Dimension (L×W×H)	3.54×1.85×.75"			
Weight	0.13lb			