DIGITAL MEASURING MICROSCOPES







0.5X camera adapter (included)



calibration plate (included)



1X camera adapter (optional)



1X auxiliary objective (included)



16G USB flash disk (included)



2X auxiliary objective (optional)

power USB ports HDMI port Step-zoom lens 0.75X-5X (zoom) LED tep

ISM-DL300 (without contour illumination)



ISM-DL301 (with contour illumination)

1080P high-definition image

- Built-in software without computer, operated by mouse
- Take pictures, save to USB flash disk
- Measurement results can be sent to Excel
- Automatic white balance and exposure
- Brightness, contrast ratio, gain are adjustable

SPECIFICATION

Part No.	ISM-DL300 (without contour illumination)	ISM-DL301 (with contour illumination)	
Magnification	15X~100X		
Sensor	1/2" CMOS		
Pixel	2M		
Resolution	1920×1080		
Frame rate	60fps		
Output	HDMI		
Power supply	power adapter		
Dimension (L×W×H)	22.44×11.81×16.93"		
Weight	14.44lb		

STANDARD DELIVERY

Part No.	ISM-DL300	ISM-DL301
Main unit	1 pc	1 pc
0.5X camera adapter	1 pc	1 pc
1X auxiliary objective	1 pc	1 pc
Calibration plate	1 pc	1 pc
16G USB flash disk	1 pc	1 pc
White/black plate	1 pc	1 pc
Mouse	1 pc	1 pc
HDMI cable	1 pc	1 pc
Power adapter	2 pcs	2 pcs

MAGNIFICATION AND MEASURING ACCURACY

Objective magnification Image magnification Measuring accuracy * 0.75X 15X ±.00031" 1X 20X ±.00028" 1.5X 30X ±.00024" 2X 40X ±.00024" 2.5X 50X ±.00024" 3X 60X ±.00020" 3.5X 70X ±.00020" 4X 80X ±.00016" 4.5X 90X ±.00016" 5X 100X ±.00016"


* When measuring the contour of workpieces, please use ISM-DL301 to ensure accuracy.

MAGNIFICATION, FOCUS DISTANCE AND VIEW FIELD

Auxiliary objective	Specification	Camera adapter	
Auxiliary objective		0.5X (included)	1X (optional)
1X (included)	magnification	15~100X	30~200X
	focus distance	2.76±.08"	2.76±.08"
	view filed	.63×.43~.1×.06"	.31×.21"~.05×.03"
2X (optional)	magnification	30~200X	60~400X
	focus distance	1.14±.08"	1.14±.08"
	view filed	.31×.21~.05×.03"	.15×.11"~.024×.016"

SOFTWARE (INCLUDED)

Refer to page 342 for details

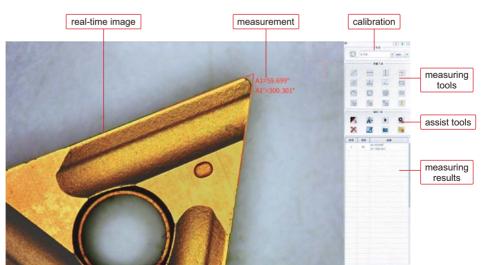



OPTIONAL ACCESSORY

1X camera adapter	ISM-DL-CA1X	
2X auxiliary objective	ISM-DL-OB2X	
X-Y glass stage (travel: 3.94"×3.38")	ISM-DL-STAGE	
X-Y metal stage	ISM-DL-STAGE1	
LED light	page 345~346	
Auxiliary objective	page 347	