


STYLI FOR CMM


■ Roundness: 0.25µm



ISQ-20-071



ISQ-25-110




M2 styli

Part No.	D	D1	L	L1*	Material of rod	Material of tip		
ISQ-20-056	.039"DIA	.031"DIA	.394"	.157"	carbide	ruby		
ISQ-20-069	.039"DIA	.031"DIA	.787"	.276"				
ISQ-20-071	.039"DIA	.031"DIA	.787"	.492"				
ISQ-20-101	.039"DIA	.031"DIA	1.06"	.807"				
ISQ-20-073	.059"DIA	.039"DIA	.787"	.492"				
ISQ-20-103	.059"DIA	.039"DIA	1.18"	.886"				
ISQ-20-075	.079"DIA	.039"DIA	.787"	.492"				
ISQ-20-105	.079"DIA	.059"DIA	1.18"	.886"				
ISQ-20-160	.079"DIA	.059"DIA	1.57"	1.38"				
ISQ-20-077	.098"DIA	.059"DIA	.787"	.472"				
ISQ-20-107	.098"DIA	.059"DIA	1.18"	.886"				
ISQ-20-162	.098"DIA	.059"DIA	1.57"	1.38"				
ISQ-20-079	.118"DIA	.059"DIA	.787"	.512"				
ISQ-20-109	.118"DIA	.059"DIA	1.18"	.984"				
ISQ-20-164	.118"DIA	.059"DIA	1.57"	1.38"				
ISQ-20-175	.118"DIA	.079"DIA	1.97"	1.67"				
ISQ-20-081	.157"DIA	.079"DIA	.866"	.866"				
ISQ-20-111	.157"DIA	.079"DIA	1.18"	1.18"				
ISQ-20-166	.157"DIA	.079"DIA	1.57"	1.57"				
ISQ-20-177	.157"DIA	.079"DIA	1.97"	1.97"				
ISQ-20-002	.039"DIA	.028"DIA	.394"	.177"	stainless steel	ruby		
ISQ-20-006	.079"DIA	.039"DIA	.394"	.236"				
ISQ-20-010	.118"DIA	.059"DIA	.394"	.394"				
ISQ-20-021	.079"DIA	.059"DIA	.787"	.551"				
ISQ-20-025	.118"DIA	.059"DIA	.787"	.689"				
ISQ-20-027	.157"DIA	.079"DIA	.787"	.787"				
ISQ-20-185	.118"DIA	.079"DIA	1.97"	1.67"	ceramic		ruby	
ISQ-20-120	.118"DIA	.079"DIA	1.18"	1.08"				
ISQ-20-201	.157"DIA	.118"DIA	1.97"	1.97"	carbon fibre			ruby

* L1 is the effective working length, which is the distance from the center of the tip to the section of the stem with the same diameter as the tip.



ISQ-010-050




M2 multi way bases of styli

Part No.	D	Remark	Material
ISQ-10-050	.295"	4-way	stainless steel
ISQ-10-060	.276"	5-way	

M2 extension rods of styli

Part No.	L	Material
ISQ-25-100	.197"	stainless steel
ISQ-25-105	.394"	
ISQ-25-110	.787"	
ISQ-25-115	1.18"	
ISQ-25-120	1.57"	ceramic
ISQ-25-125	1.18"	
ISQ-25-130	1.57"	carbon fibre
ISQ-25-135	1.97"	
ISQ-25-140	1.57"	
ISQ-25-145	1.97"	
ISQ-25-150	2.76"	
ISQ-25-155	3.54"	




M2 thread converter (mm)

Part No.	L	Material
ISQ-70-004	.276"	stainless steel



ISQ-35-110





M3 extension rods of styli

Part No.	L	Material
ISQ-35-100	.394"	stainless steel
ISQ-35-105	.787"	
ISQ-35-110	1.38"	ceramic
ISQ-35-115	1.97"	
ISQ-35-120	2.95"	carbon fibre
ISQ-35-125	3.94"	



ISQ-30-066

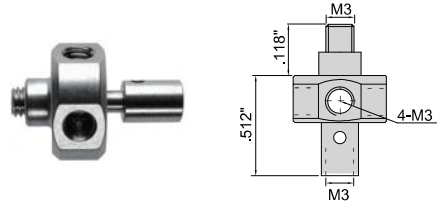

M3 styli

Part No.	D	D1	L	L1	Material of rod	Material of tip
ISQ-30-013	.020"DIA	.016"DIA	.827"	.079"	carbide	ruby
ISQ-30-017	.059"DIA	.039"DIA	.787"	.492"		
ISQ-30-028	.059"DIA	.039"DIA	1.18"	.886"		
ISQ-30-031	.079"DIA	.059"DIA	1.18"	.886"		
ISQ-30-040	.079"DIA	.059"DIA	1.57"	1.28"		
ISQ-30-020	.098"DIA	.079"DIA	.787"	.492"		
ISQ-30-043	.098"DIA	.079"DIA	1.57"	1.28"		
ISQ-30-034	.098"DIA	.079"DIA	1.18"	.886"		
ISQ-30-046	.118"DIA	.079"DIA	1.57"	1.28"		
ISQ-30-055	.118"DIA	.079"DIA	1.97"	1.67"		
ISQ-30-049	.157"DIA	.079"DIA	1.57"	1.42"		
ISQ-30-058	.157"DIA	.079"DIA	1.97"	1.81"		
ISQ-30-037	.118"DIA	.079"DIA	1.18"	.886"		
ISQ-30-052	.197"DIA	.098"DIA	1.57"	1.57"	ceramic	carbon fibre
ISQ-30-066	.118"DIA	.079"DIA	1.97"	1.67"		
ISQ-30-070	.157"DIA	.079"DIA	1.97"	1.81"		
ISQ-30-075	.157"DIA	.079"DIA	1.97"	1.97"		
ISQ-30-080	.236"DIA	.157"DIA	2.95"	2.95"		
ISQ-30-085	.236"DIA	.157"DIA	3.94"	3.94"		
ISQ-30-082	.315"DIA	.157"DIA	2.95"	2.95"		
ISQ-30-088	.315"DIA	.157"DIA	3.94"	3.94"		


* L1 is the effective working length, which is the distance from the center of the tip to the section of the stem with the same diameter as the tip.

M3 multi way bases of styli


Part No.	Remark	Material
ISQ-10-070	5-way	stainless steel



ISQ-40-195



ISQ-45-025



M4 extension rods of styli

Part No.	L	Material
ISQ-45-007	.787"	stainless steel
ISQ-45-009	1.18"	
ISQ-45-025	1.18"	ceramic
ISQ-45-028	1.97"	
ISQ-45-031	3.94"	
ISQ-45-043	7.87"	


M4 styli

Part No.	D	D1	L	L1*	Material of rod	Material of tip
ISQ-40-106	.039"DIA	.028"DIA	.768"	.157"	stainless steel	ruby
ISQ-40-109	.079"DIA	.059"DIA	.748"	.315"		
ISQ-40-113	.118"DIA	.079"DIA	.728"	.512"		
ISQ-40-141	.039"DIA	.028"DIA	.787"	.394"	carbide	
ISQ-40-145	.079"DIA	.059"DIA	.787"	.394"		
ISQ-40-195	.079"DIA	.079"DIA	1.97"	1.57"		
ISQ-40-149	.118"DIA	.079"DIA	.787"	.394"		
ISQ-40-198	.118"DIA	.079"DIA	1.97"	1.50"		
ISQ-40-153	.157"DIA	.079"DIA	.787"	.394"		
ISQ-40-202	.157"DIA	.079"DIA	1.97"	1.50"	ceramic	
ISQ-40-172	.157"DIA	.118"DIA	1.97"	1.42"		
ISQ-40-173	.197"DIA	.157"DIA	1.97"	1.34"		
ISQ-40-179	.236"DIA	.157"DIA	1.97"	1.42"		
ISQ-40-222	.236"DIA	.157"DIA	2.95"	2.48"		
ISQ-40-240	.197"DIA	.157"DIA	3.94"	3.31"		
ISQ-40-245	.236"DIA	.157"DIA	3.94"	3.39"		

* L1 is the effective working length, which is the distance from the center of the tip to the section of the stem with the same diameter as the tip.



ISQ-50-059




M5 styli

Part No.	D	D1	L	L1*	Material of rod	Material of tip
ISQ-50-051	.039"DIA	.028"DIA	.787"	.197"	carbide	ruby
ISQ-50-083	.059"DIA	.039"DIA	1.18"	.472"		
ISQ-50-110	.059"DIA	.039"DIA	1.57"	.787"		
ISQ-50-059	.079"DIA	.059"DIA	.787"	.433"		
ISQ-50-086	.079"DIA	.039"DIA	1.18"	.827"		
ISQ-50-112	.079"DIA	.039"DIA	1.57"	1.22"		
ISQ-50-150	.079"DIA	.039"DIA	1.97"	.197"		
ISQ-50-067	.118"DIA	.079"DIA	.787"	.433"		
ISQ-50-092	.118"DIA	.079"DIA	1.18"	.827"		
ISQ-50-159	.118"DIA	.079"DIA	1.97"	1.61"		
ISQ-50-071	.157"DIA	.079"DIA	.787"	.433"		
ISQ-50-162	.157"DIA	.079"DIA	1.97"	1.61"		
ISQ-50-216	.157"DIA	.118"DIA	2.95"	2.56"		
ISQ-50-075	.197"DIA	.118"DIA	.787"	.433"		
ISQ-50-165	.197"DIA	.118"DIA	1.97"	1.61"		
ISQ-50-219	.197"DIA	.118"DIA	2.95"	2.56"		
ISQ-50-290	.197"DIA	.118"DIA	3.94"	2.36"		
ISQ-50-175	.236"DIA	.157"DIA	1.97"	1.54"	carbon fibre	ruby
ISQ-50-235	.236"DIA	.157"DIA	2.95"	2.52"		
ISQ-50-350	.236"DIA	.157"DIA	5.91"	5.12"		

* L1 is the effective working length, which is the distance from the center of the tip to the section of the stem with the same diameter as the tip.



ISQ-55-014



M5 extension rods of styli

Part No.	D	L	Material
ISQ-55-012	.394"DIA	.787"	stainless steel
ISQ-55-014	.394"DIA	1.18"	
ISQ-55-016	.394"DIA	1.97"	
ISQ-55-018	.394"DIA	3.94"	
ISQ-55-031	.787"DIA	1.97"	aluminum
ISQ-55-035	.787"DIA	3.94"	
ISQ-55-039	.787"DIA	7.87"	