
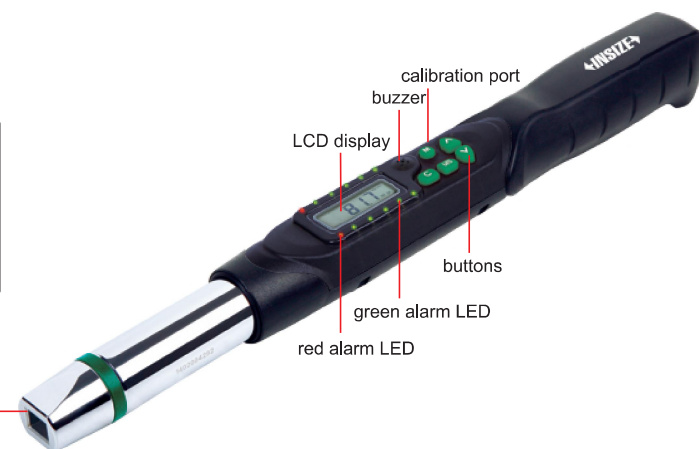


## INTERCHANGEABLE HEAD QUALITY INSPECTION TORQUE WRENCHES




IST-16W135A

OPTIONAL ACCURACY:  
CLOCKWISE:  $\pm 1\%$   
COUNTER-CLOCKWISE:  $\pm 2\%$


MEASURE THE TORQUE  
OF TIGHTENED BOLTS

- Retighten the tightened bolt to measure the torque, the torque value can be displayed when the bolt is turned again
- Three measuring modes:  
Angle mode: rotation angle can be set, when turning to the angle, 2 LED lights blinking and buzzer beeping, capturing torque values  
Maximum value display mode: capturing peak torque values  
Real-time value display mode: real-time tracking of torque values
- Unit: N.m, in.lb, ft.lb, kg.cm
- With audible and visible alarm, 9 preset usage modes
- In angle mode and maximum value mode, upper and lower tolerance limits can be set to determine pass or fail by LED lights
- Clockwise and count-clockwise operation
- Memory of 50 results
- Enter power saving mode after 2 minutes
- Non-slip grip handle
- With overload record (once the torque reaches 110% of the maximum range)

ratchet head (included)

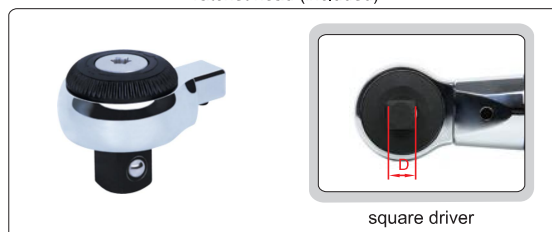

torque correction

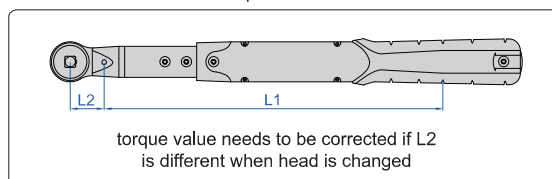

### SPECIFICATION

Part No.	IST-16W30A	IST-16W135A	IST-16W200A	IST-16W340A
Range	53.0~265.5in.lb 6~30N.m	239~1195in.lb 27~135N.m	354~1770in.lb 40~200N.m	602~3009in.lb 68~340N.m
Accuracy	clockwise	$\pm 2\%$		
	counter-clockwise	$\pm 3\%$		
Resolution	.1in.lb 0.01N.m	1in.lb 0.1N.m	1in.lb 0.1N.m	1in.lb 0.1N.m
Socket size (A×B)	.47×.35"	.47×.35"	.71×.55"	.71×.55"
Arm length (L1)	10.74"	11.33"	15.01"	19.73"
Power supply	2×AA batteries			
Weight	1.67lb	2.07lb	2.95lb	3.39lb

### RATCHET HEAD (INCLUDED) SPECIFICATION

Code of torque wrench	IST-16W30A	IST-16W135A	IST-16W200A	IST-16W340A
Square driver (D)	1/4"	3/8"	1/2"	1/2"
Length (L2)	1.14"	1.14"	1.57"	1.57"

### STANDARD DELIVERY

Torque wrench	1 pc
Ratchet head	1 pc

### OPTIONAL ACCESSORY

Calibration cable	IST-W-CABLE
Interchangeable head	refer to details



#### RATCHET HEAD (optional, additional)

Part No.	Square driver (D)	Applicable wrenches
IST-2W-R1	1/4"	IST-16W30A
IST-2W-R2	3/8"	IST-16W135A
IST-2W-R3	1/2"	IST-16W135A
IST-2W-R4	1/2"	IST-16W200A IST-16W340A



#### ADJUSTABLE SPANNER HEAD (optional)

Part No.	Open size	Applicable wrenches
IST-2W-A1	.20~1.06"	IST-16W135A
IST-2W-A2	.20~1.18"	IST-16W200A
IST-2W-A3	.39~1.61"	IST-16W340A



#### OPEN END HEAD (optional)

Part No.	Open size	Applicable wrenches
IST-2W-K1B	1/4"	IST-16W30A IST-16W135A
IST-2W-K5D	5/16"	
IST-2W-K3C	3/8"	
IST-2W-K7D	7/16"	
IST-2W-K1A	1/2"	
IST-2W-K9D	9/16"	
IST-2W-K5C	5/8"	
IST-2W-K11D	11/16"	
IST-2W-K3B	3/4"	IST-16W200A IST-16W340A
IST-2W-2K1A	1/2"	
IST-2W-2K9D	9/16"	
IST-2W-2K5C	5/8"	
IST-2W-2K11D	11/16"	
IST-2W-2K3B	3/4"	
IST-2W-2K13D	13/16"	
IST-2W-2K7C	7/8"	
IST-2W-2K15D	15/16"	
IST-2W-2K1W	1"	
IST-2W-2K1F	1.1/8"	



#### BOX END HEAD (optional)

Part No.	Open size	Applicable wrenches
IST-2W-M1B	1/4"	IST-16W30A IST-16W135A
IST-2W-M5D	5/16"	
IST-2W-M3C	3/8"	
IST-2W-M7D	7/16"	
IST-2W-M1A	1/2"	
IST-2W-M9D	9/16"	
IST-2W-M5C	5/8"	
IST-2W-M11D	11/16"	
IST-2W-M3B	3/4"	
IST-2W-M13D	13/16"	
IST-2W-M7C	7/8"	