


DIGITAL ANGLE TORQUE WRENCHES



RANGE 6~340N.m OPTIONAL ACCURACY:
CLOCKWISE: $\pm 1\%$, COUNTER-CLOCKWISE: $\pm 2\%$

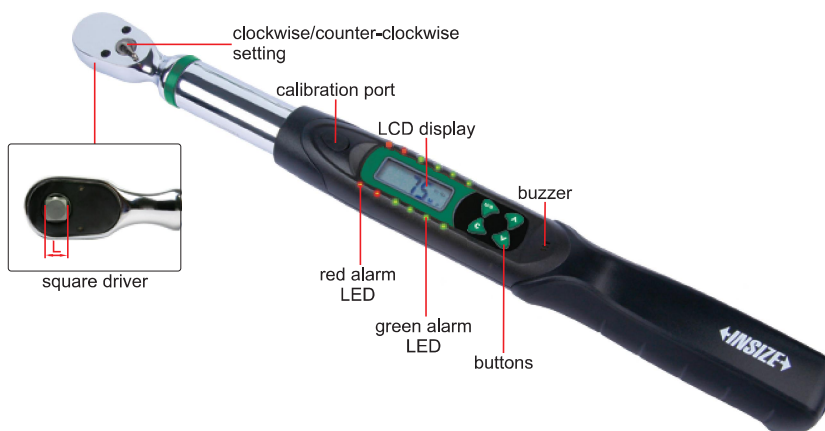

IST-1W135A

- Clockwise and counter-clockwise operation
- Set the desired torque first, after reaching the desired torque, set the angle and turn the wrench at this angle to apply extra torque
- Unit: N.m, in.lb, ft.lb, kg.cm, degree
- Peak and track working mode
- Target torque or angle value can be set, with audible and visible alarm:
 - Green LED light on and buzzer sounds when torque or angle value is 90%~100% of target torque or angle
 - Both green and red LED light on and buzzer sounds when target torque or angle value is reached
- Power off in 5 minutes automatically
- Non-slip grip handle
- With damp record
- With overload record (once the torque reaches 110% of the maximum range)



set the desired torque first, after reaching the desired torque, set the angle and turn the wrench at this angle to apply extra torque

SPECIFICATION

Part No.	Range		Accuracy	Resolution		Square driver (L)	Power supply	Length	Weight
	torque	angle		torque	angle				
IST-1W30A	53.0~265.5in.lb	0~999°	clockwise: $\pm 2\%$ counter-clockwise: $\pm 3\%$ $\pm 2^\circ$ (rotate 90°)	.1in.lb	1°	1/4"	2×AA batteries	15.35"	1.67lb
IST-1W135A	239~1195in.lb			1in.lb		3/8"		16.34"	2.07lb
IST-1W200A	354~1770in.lb			1in.lb		1/2"		20.87"	2.95lb
IST-1W340A	602~3009in.lb			1in.lb		1/2"		25.59"	3.39lb
IST-1W500A	73.7~368.7ft.lb		clockwise: $\pm 2.5\%$ counter-clockwise: $\pm 3.5\%$ $\pm 2^\circ$ (rotate 90°)	.1ft.lb		3/4"		37.40"	6.50lb
IST-1W850A	125.4~626.8ft.lb			.1ft.lb		3/4"		48.03"	9.39lb
IST-1W1200A	177~885ft.lb			1ft.lb		1"		70.28"	19.83lb
IST-1W1500A	221~1106ft.lb			1ft.lb		1"		70.28"	19.83lb
IST-1W2000A	295~1475ft.lb			1ft.lb		1"		70.28"	22.03lb

OPTIONAL ACCESSORY

Calibration cable	IST-W-CABLE
-------------------	-------------