

# COLOR SCREEN MULTIFUNCTIONAL DIGITAL TORQUE WRENCHES




DATA  
OUTPUT

RANGE 6~340N.m OPTIONAL ACCURACY:  
CLOCKWISE:  $\pm 1\%$ , COUNTER-CLOCKWISE:  $\pm 2\%$

clockwise/counter-clockwise  
setting



IST-40W200A

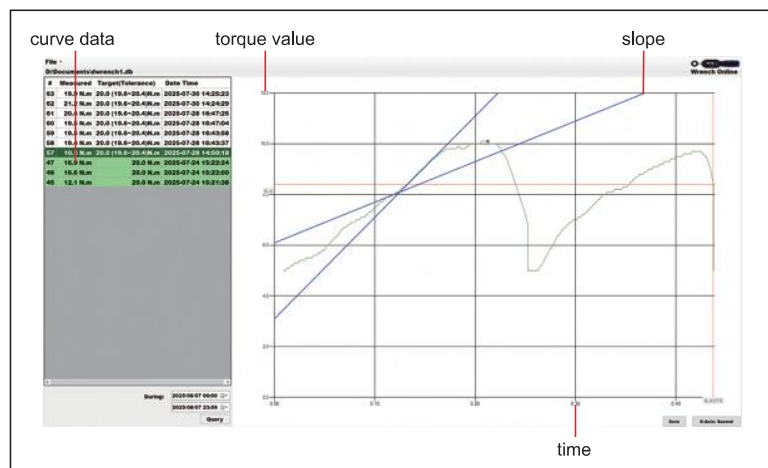

software (included)

## Torque wrench:

- Clockwise and counter-clockwise operation
- Maximum value and real-time value displayed simultaneously
- Three display modes for torque values: pointer, numerical, and curve
- Upper and lower tolerance limits can be set to determine pass or fail by LED lights
- 9 preset target torque values
- With audible and visible alarm:
  - Green LED light on in sequence and buzzer sounds louder and louder when torque value is 80%~99.5% of target torque
  - Both green and red LED light on and buzzer sounds long-lasting alarm when torque value is over 99.5% of target torque
- Functions are presented in diagram form for users to select
- Auto power off time can be set
- Non-slip grip handle
- With overload record (once the torque reaches 110% of the maximum range)

## Memory and data transmission:

- The data is stored in the wrench when the wrench is disconnected, and the data is automatically uploaded to computer after transmission cable is connected to the software
- Real-time uploading of data when transmission cable is connected to the software
- The data in the software can be exported to Excel
- View the slope of curve and drag the slope to compare it

## STANDARD DELIVERY

Digital torque wrench	1 pc
USB transmission cable and software	1 set

## SPECIFICATION

Part No.	Range	Accuracy	Resolution	Unit	Square driver (L)	Power supply	Length	Weight
IST-40W30A	53.1~265.5in.lb	clockwise: $\pm 2\%$ counter-clock wise: $\pm 3\%$	0.1in.lb	N.m in.lb ft.lb kg.cm	1/4"	rechargeable lithium battery	13.58"	2.07lb
IST-40W60A	106.2~530.9in.lb		0.1in.lb		3/8"		15.28"	2.34lb
IST-40W135A	239~1195in.lb		1in.lb		3/8"		16.42"	2.49lb
IST-40W200A	354~1770in.lb		1in.lb		1/2"		21.06"	3.22lb
IST-40W340A	602~3009in.lb		1in.lb		1/2"		25.79"	3.92lb