





IST-DDT5
type A

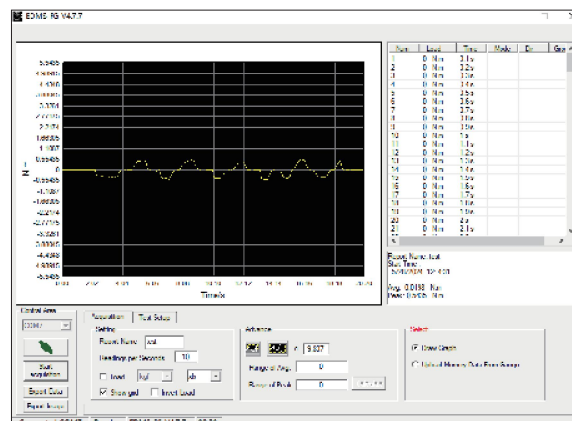

IST-DDT5S
type B



software (included)

- External sensor
- Metal case, touch buttons
- Clockwise and counter-clockwise operation
- Test mode: track, peak, first peak, preset tolerance
- Unit: lbf.in, lbf.ft, N.m, N.cm, kgf.cm
- Set tolerance with judgement
- 1000 memories
- LCD display with backlight, can automatically turn 180°
- Overload alarm
- Automatic power off

SPECIFICATION

Part No.	IST-DDT1	IST-DDT5	IST-DDT10	IST-DDT1S	IST-DDT5S	IST-DDT10S
Load capacity	.44~8.85lbf.in	2.21~44.3lbf.in	4.43~88.5lbf.in	.44~8.85lbf.in	2.21~44.3lbf.in	4.43~88.5lbf.in
	—	.18~3.69lbf.ft	.37~7.38lbf.ft	—	.18~3.69lbf.ft	.37~7.38lbf.ft
Resolution	.001lbf.in	.005lbf.in	.01lbf.in	.001lbf.in	.005lbf.in	.01lbf.in
	—	.0005lbf.ft	.001lbf.ft	—	.0005lbf.ft	.001lbf.ft
Max. clamping diameter	.40" DIA	.40" DIA	.51" DIA	1.97" DIA	1.97" DIA	1.97" DIA
Type	A			B		
Sampling frequency	2000Hz					
Accuracy	±0.3% (of load capacity)					
Output	USB, RS232, alarm signal					
Power supply	built-in rechargeable battery					
Dimension	5.71x2.87x1.34"					
Weight	3.09lb					



printer (optional)

STANDARD DELIVERY

Main unit	1 pc
External sensor	1 pc
AC/DC adapter	1 pc
Transmission cable (keyboard signal)	1 pc
Measuring software	1 set

OPTIONAL ACCESSORY

Printer	ISF-DF-PRINTER
RS232 cable	IST-DDT-CABLE
Wireless transmitter (receiver is needed)	7315-ISF-D