



VIDEOSCOPE

REAR FIBER ILLUMINATION

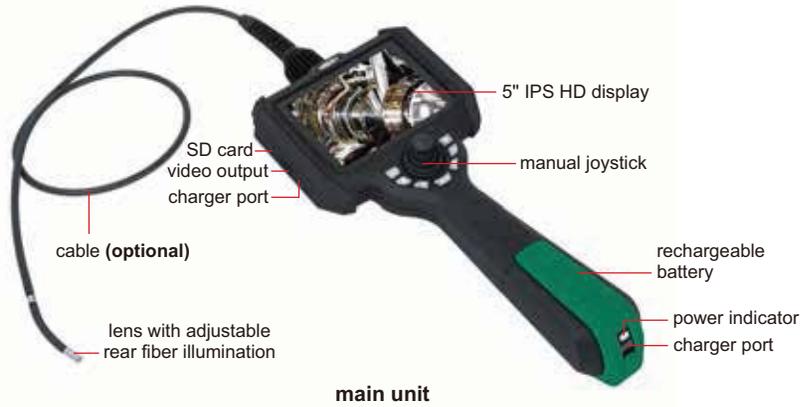

main unit



tripod (included)



changeable lens cable



ISV-L-HOOK (optional)



ISV-L-MAGNET (optional)

MAIN UNIT (WITHOUT CABLE)

Part No.	ISV-L
Display	5" high definition LCD
Resolution	1024×720
Function	take pictures, take videos
File format	picture: JPG, video: MP4
Image process	image zoom (1X, 2X, 3X, 4X)
Image control	freeze, flip over, playback and analog ruler
Memory	memory card
Output	WIFI (only for Android OS), USB, HDMI
Power supply	rechargeable lithium battery (working time ≥4 hours) AC/DC adapter (for continuous working)
Weight	2.205lb



WIFI real-time image transmission



ISV-L-CLAMP (optional)

OPERATION ENVIRONMENT


Main unit	14~122°F, no preheat
Operation temperature	-4~158°F
Storage temperature	-4~140°F
Relative humidity	maximum 90%, no condensation

STANDARD DELIEVERY

Main unit	1 pc
32G SD card	1 pc
Card reader	1 pc
USB cable	1 pc
Tripod	1 pc
AC/DC adapter	1 pc

OPTIONAL ACCESSORY

Cable	please refer to details
Temperature alarm	ISV-L-HTALARM (must be installed in factory, for .154" DIA, .177" DIA and .236" DIA)
Hook	ISV-L-HOOK (must be installed in factory, for .154" DIA, .177" DIA and .236" DIA)
Magnet	ISV-L-MAGNET (must be installed in factory, for .154" DIA, .177" DIA and .236" DIA)
Clamp	ISV-L-CLAMP

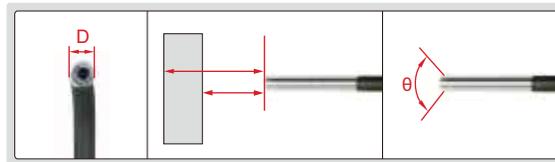


diameter (D)

depth of field (DOF)

angle of view (θ)


ONE-DIRECTION CABLE (NO BENDING), FRONT VIEW

Part No.	Cable		Lens							
	length	type	view direction	diameter (D)	depth of field (DOF)	angle of view (θ)	illumination	pixel	resolution	dust/ waterproof
ISV-L09505	20"	spring tube	front view	.037"	.118~1.181"	>120°	rear fiber	0.16M	400×400	IP65
ISV-L09510	40"			.047"	.118~1.181"					
ISV-L1210	40"			.047"	.118~1.181"					
ISV-L1510	40"	tungsten wire weaved cable		.059"	.118~2.756"					
ISV-L1515	60"		.059"	.118~2.756"						

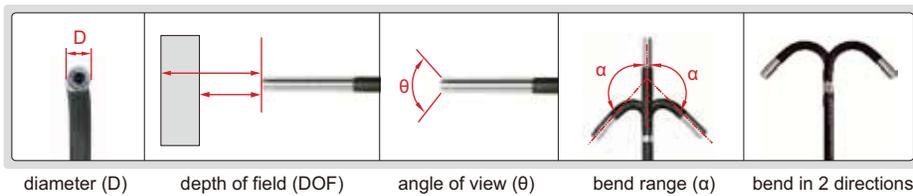


TWO-DIRECTION BENDING CABLE, FRONT VIEW

Part No.	Cable		Lens									
	length	type	view direction	bend direction	diameter (D)	depth of field (DOF)	bend range (α)	angle of view (θ)	illumination	pixel	resolution	dust/ waterproof
ISV-L1810	40"	tungsten wire weaved cable	front view	two directions	.071" DIA	.118~1.181"	$\pm 160^\circ$	$> 120^\circ$	rear fiber	0.16M	400×400	IP65
ISV-L2010	40"				.079" DIA	.118~1.181"						
ISV-L2410	40"				.094" DIA	.118~1.181" (optional .197~3.937")						
ISV-L2415	60"											
ISV-L2420	80"											

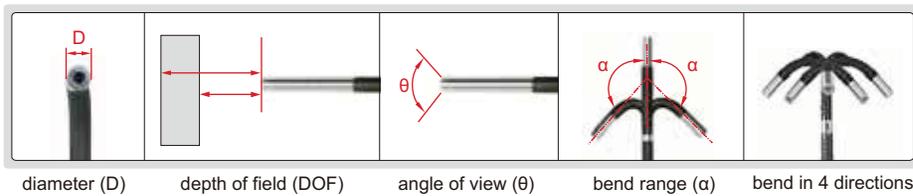


FOUR-DIRECTION BENDING CABLE, FRONT VIEW

Part No.	Cable		Lens									
	length	type	view direction	bend direction	diameter (D)	depth of field (DOF)	bend range (α)	angle of view (θ)	illumination	pixel	resolution	dust/ waterproof
ISV-L2810	40"	tungsten wire weaved cable	front view	four directions	.110" DIA	.118~1.181" (optional .197~3.937")	$\pm 160^\circ$	$> 120^\circ$	rear fiber	0.16M	400×400	IP65
ISV-L2815	60"											
ISV-L2820	80"											
ISV-L2830	120"											
ISV-L3910	40"											
ISV-L3915	60"				.154" DIA	.315~5.906" (optional .118~2.756")						
ISV-L3920	80"											
ISV-L3930	120"											
ISV-L3940	160"											
ISV-L3950	200"											
ISV-L6010	40"				.236" DIA	.472~7.874" (optional .118~2.756", .315~5.906")				0.92M	1280×720	IP67
ISV-L6015	60"											
ISV-L6020	80"											
ISV-L6030	120"											
ISV-L6040	160"											
ISV-L6050	200"											
ISV-L6060	240"											
ISV-L6070	280"											

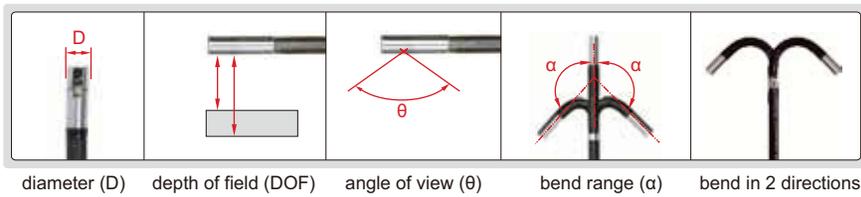

TWO-DIRECTION BENDING CABLE, SIDE VIEW

Part No.	Cable		Lens									
	length	type	view direction	bend direction	diameter (D)	depth of field (DOF)	bend range (α)	angle of view (θ)	illumination	pixel	resolution	dust/ waterproof
ISV-L1810C	40"	tungsten wire weaved cable	side view	two directions	.071"	.118~1.181"	$\pm 160^\circ$	$> 120^\circ$	rear fiber	0.16M	400×400	IP65
ISV-L1815C	60"											

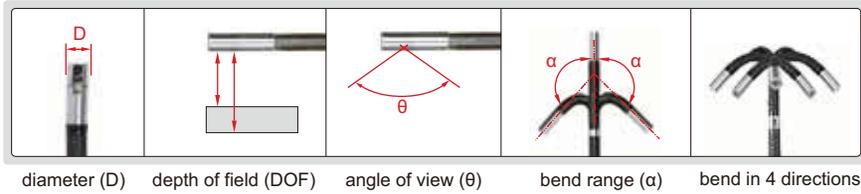

FOUR-DIRECTION BENDING CABLE, SIDE VIEW

Part No.	Cable		Lens									
	length	type	view direction	bend direction	diameter (D)	depth of field (DOF)	bend range (α)	angle of view (θ)	illumination	pixel	resolution	dust/ waterproof
ISV-L2810C	40"	tungsten wire weaved cable	side view	four directions	.110"	.118~2.756"	$\pm 160^\circ$	$> 120^\circ$	rear fiber	0.16M	400×400	IP65
ISV-L2815C	60"											
ISV-L2820C	80"											
ISV-L2830C	120"											
ISV-L4510C	40"				.117"	.197~3.937" (optional .315~5.906")				0.92M	960×720	IP67
ISV-L4515C	60"											
ISV-L4520C	80"											
ISV-L4530C	120"											
ISV-L6010C	40"				.236"	.315~5.906" (optional .197~3.937")				0.92M	960×720	IP67
ISV-L6015C	60"											
ISV-L6020C	80"											
ISV-L6030C	120"											
ISV-L6040C	160"											
ISV-L6050C	200"											