


REAR FIBER ILLUMINATION



front and side view lens cable

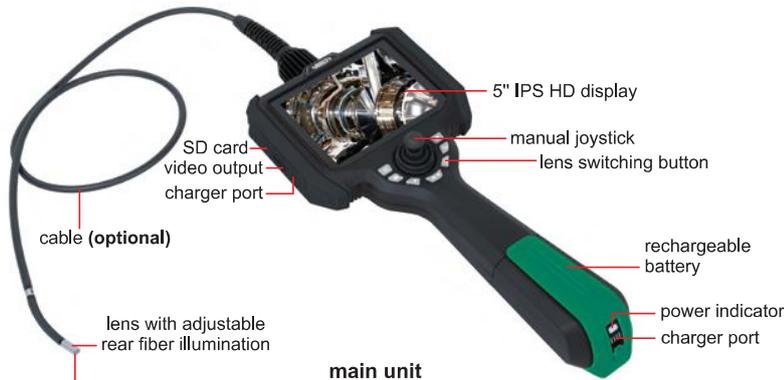

tripod (included)



ISV-K-CLAMP (optional)



WIFI real-time image transmission



ISV-S-HOOK (optional)



ISV-S-MAGNET (optional)



changeable lens cable

FRONT AND SIDE VIEW VIDEOSCOPE (CABLE IS OPTIONAL)

MAIN UNIT (WITHOUT CABLE)

Part No.	ISV-S
Display	5" high definition LCD
Resolution	1024×720
Function	take pictures, take videos
File format	picture: JPG, video: MP4
Image process	image zoom (1X, 2X, 3X, 4X)
Image control	freeze, flip over, playback and analog ruler
Memory	memory card
Output	WIFI (only for Android OS), USB, HDMI
Power supply	rechargeable lithium battery (working time ≥ 4hours) AC/DC adapter (for continuous working)
Net weight	2.205lb

OPERATION ENVIRONMENT


Main unit	14~122°F, no preheat
Operation temperature	-4~158°F
Storage temperature	-4~140°F
Relative humidity	maximum 90%, no condensation

STANDARD DELIVERY

Main unit	1 pc
32G SD card	1 pc
Card reader	1 pc
USB cable	1 pc
Tripod	1 pc
AC/DC adapter	1 pc

OPTIONAL ACCESSORY

Cable	please refer to next pages for details
Temperature alarm	ISV-S-HTALARM (must be installed in factory, for .154" DIA, .236" DIA)
Hook	ISV-S-HOOK (must be installed in factory, for .154" DIA, .236" DIA)
Magnet	ISV-S-MAGNET (must be installed in factory, for .154" DIA, .236" DIA)
Clamp	ISV-K-CLAMP

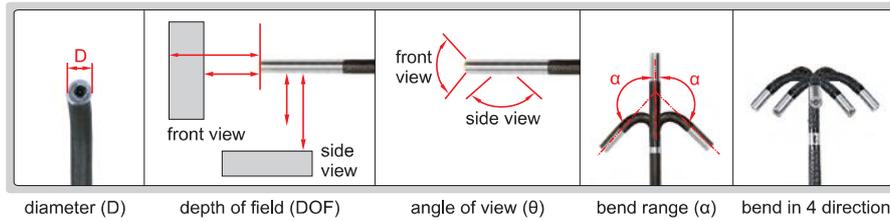

FOUR-DIRECTION BENDING CABLE, FRONT VIEW&SIDE VIEW

Part No.	Cable		Lens									
	length	type	view direction	bend direction	diameter (D)	depth of field (DOF)	bend range (α)	angle of view (θ)	illumination	pixel	resolution	dust/ waterproof
ISV-S2810	40"	tungsten wire weaved cable	front view and side view	four directions	.11" DIA	front view: .118~2.756" side view: .118~2.756"	±160°	>120°	front LED	0.16M	400×400	IP65
ISV-S2815	60"											
ISV-S2820	80"											
ISV-S2830	120"											
ISV-S3910	40"	tungsten wire weaved cable	front view and side view	four directions	.154" DIA	front view: .276~5.906" side view: .197~3.15"	±160°	>120°	rear fiber	0.92M	1280×720	IP67
ISV-S3915	60"											
ISV-S3920	80"											
ISV-S3930	120"											
ISV-S3940	160"											
ISV-S3950	200"											
ISV-S6010	40"	tungsten wire weaved cable	front view and side view	four directions	.236" DIA	front view .472~7.874" (optional .118~2.756") side view .315~5.906" (optional .118~2.756")	±160°	>120°	rear fiber	0.92M	1280×720	IP67
ISV-S6015	60"											
ISV-S6020	80"											
ISV-S6030	120"											
ISV-S6040	160"											
ISV-S6050	200"											