


PORTABLE TEMPERATURE DRY BLOCK CALIBRATORS (LOW TEMPERATURE TYPE)

- Used for temperature calibration in industrial or laboratory
- Multi-point temperature correction function
- Segmented PID control, one-button heating and cooling, full-automatic temperature control
- Refrigeration mode: thermoelectric cooling, antifreeze coolant
- RS232 communication interface is included

soaking block (included), can be customized

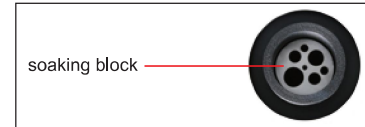

LBC-TS40-U

STANDARD DELIVERY

Main unit	1 pc
Soaking block	1 pc

SPECIFICATION

Part No.	LBC-TS40-U	LBC-TS30-U	LBC-TS20-U
Temperature range	-40°C~100°C	-30°C~150°C	-20°C~150°C
Temperature resolution	0.01°C		
Temperature fluctuation	±0.1°C		
Radial uniformity	±0.2°C		
Soaking block	insertion aperture: .16"DIA, .16 "DIA, .24"DIA, .24"DIA, .32"DIA, .40"DIA can be customized		
Hole insertion depth	5.91"		
Control method	4.2" touch screen		
Operating environment	temperature: 71.6°F±5.4°F, humidity: 15%RH~65%RH		
Power	500W		
Power supply	AC110V, 60Hz		
Dimension (L×W×H)	13.4×7.09×15.2"		
Net weight	20.3lb		