



PORTABLE TEMPERATURE DRY BLOCK CALIBRATOR (LOW TEMPERATURE TYPE) PART NO. LTB-TS30-U

- Used for temperature calibration in industrial or laboratory
- Unit: °F, °C
- Language: English, Chinese
- Overheat protection
- Multi-point temperature correction function
- Segmented PID control, one-button heating and cooling, full-automatic temperature control
- Refrigeration mode: thermoelectric cooling

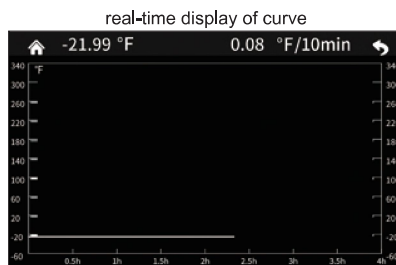

soaking block (included), can be customized

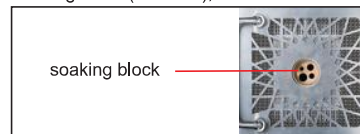

SPECIFICATION

Temperature range	-22°F~302°F
Temperature resolution	.01°F
Temperature fluctuation	±.27°F
Radial uniformity	±.36°F
Soaking block	insertion aperture: .18"DIA, .26"DIA, .32"DIA, .39"DIA can be customized
Depth	well depth: 6.3", hole depth: 6.1"
Control method	touch screen
Power	450W
Power supply	110V/60Hz
Dimension (L×W×H)	12.60×6.69×12.99"
Net weight	19.8lb

STANDARD DELIVERY

Main unit	1 pc
Soaking block	1 pc