


MOUNTING PRESS (ADVANCED TYPE)

PART NO. MLP-MP42-U



- Integrally molded high-strength composite housing, sturdy, durable and rust-resistant
- Touchscreen display & control system supporting real-time temperature curve display
- Fully automatic closed-loop control system; one-touch operation finishes the entire mounting process
- Equipped with automatic water cooling system for rapid cooling, mounting time down to 7 minutes
- Supports storage of 10 sets of mounting recipes to facilitate mass standardized production
- Comprehensive safety protections, including automatic power cut-off in case of overheating
- External circulating cooling water tank available as an option to save water and lower operating costs

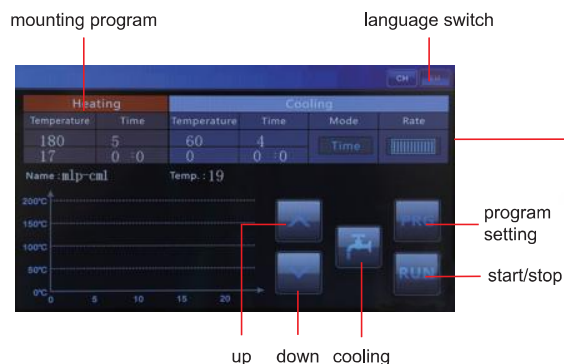

hot mounting resin (included)



slice clip (optional)

SPECIFICATION

Mounting diameter	1.18" DIA
Max. mounting height	1"
heating power	1000W
Pressure mode	pneumatic press
Pressure range	≥0.5Mpa
Heating temperature	room temperature ~ 180°C
Holding time	0~99min
Cooling control	temperature control, time control, manual control
Cooling temperature	0~100°C
Cooling time	1~100min
Programmable quantity	10 sets
Total power	1200W
Power supply	110V, 60Hz
Dimension (L×W×H)	15.75×15.75×16.56"
Net weight	55.12lb

STANDARD DELIVERY

Main unit	1 pc
Hot mounting resin (MLP-DR1)	1 pc
Mounting release agent (MLP-RA2)	1 pc
Funnel	1 pc
Charging scoop	1 pc
Inlet pipe/drain pipe	1 set

OPTIONAL ACCESSORY

Hot mounting resin	MLP-DR□□*series
Mounting release agent	MLP-RA2
Slice clip	MLP-QP1
Circulation tank	MLP-MP42-TANK

* □□ is detailed specs; e.g. code **MLP-DR1** stands for black standard hot mounting powder (500g)