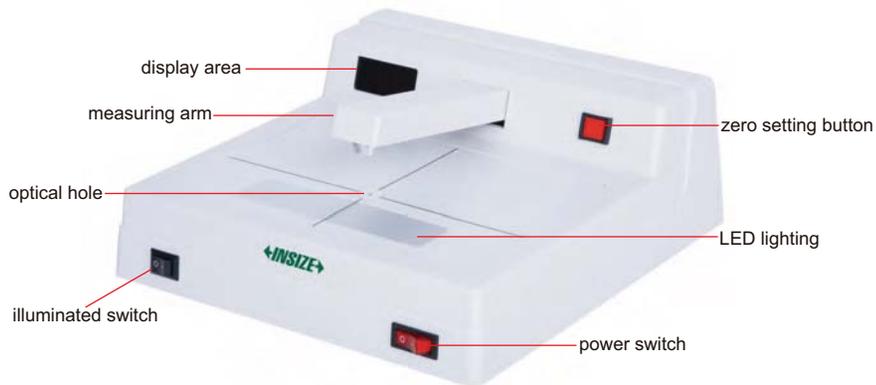# BLACK AND WHITE DENSITOMETER
CODE RXT-BM301-U

- With accurate reading, good stability, easy to operate
- Small size, light weight, 27 LED lighting source, good shock resistance
- Comes with calibration software and standard black and white density film, allowing self calibration of instruments
- Suitable for industries such as non-destructive testing, photosensitive materials, printing, etc

display area — measuring arm — zero setting button — optical hole — LED lighting — illuminated switch — power switch

black and white density film(0.0~5.0)
(included)

SPECIFICATION

Blackness range	D=0.00~5.00
Reading stability	±0.02
Accuracy	±0.02 (0.0<D≤2.0) ±1% (2.0<D≤4.0) ±0.05 (4.0<D≤5.0)
Optical aperture	0.08"DIA
Sampling time	0.8s
Display form	three-digit display
Interface	Rs232 (optional accessory USB cable)
Operation environment	32°F~104°F, relative humidity ≤85%
Power supply	110V, 50/60Hz
Dimension	10.24×10.43×4.33"
Weight	4.63lb

STANDARD DELIVERY

Main unit	1pc
Black and white density film (0.0~5.0)	1pc
USB flash disk	1pc
RS232 cable	1pc

OPTIONAL ACCESSORY

USB cable	**RXT-BM301-CA**