


STANDARD TEST BLOCKS FOR ULTRASONIC PHASED ARRAY DETECTION




UFD-KPA (type A)

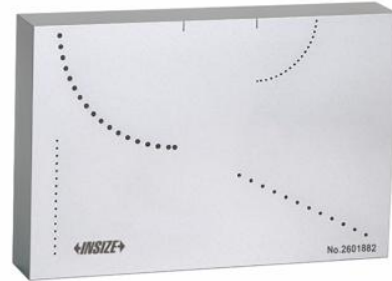


UFD-KPB (type B)

Unit: in

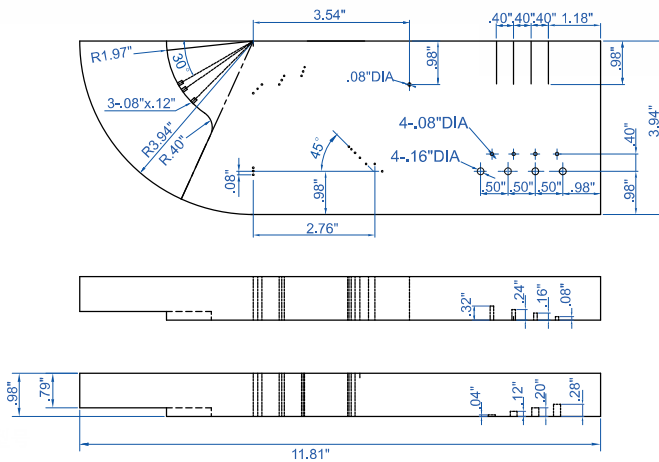

Unit: in

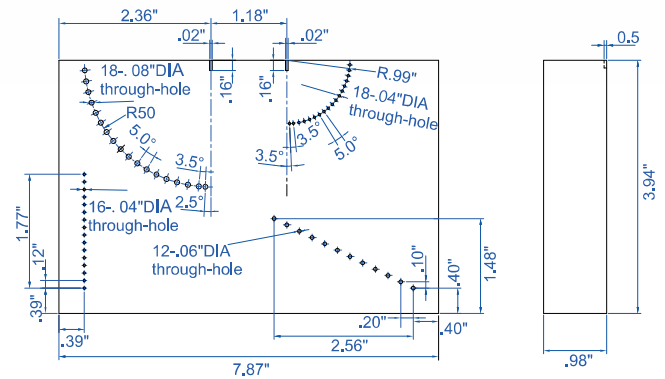

- Conforms to NB/T 47013 standard
- Simulate defects in standard through-holes and blind holes at different locations, angles, and sizes

SPECIFICATION

Part No.	Material	Casing dimension (L×W×T)	Features
UFD-KPA	20#	11.81"×3.94"×.98"	lateral resolution (angle), longitudinal resolution (depth), short-defect resolution
UFD-KPB	20#	6.69"×3.94"×.98"	lateral dimensional error, longitudinal dimensional error, sector angle error, angular resolution