

## BUILT-IN BLUETOOTH LIGHT METER


### PART No. 0133-LM80

BUILT-IN  
BLUETOOTH

- Built-in bluetooth
- Android app included
- Photosensor can rotate 90° clockwise and 180° counter-clockwise
- Built-in calibration filters ensure the accuracy when working in different colors
- Data hold function
- Lux/FC unit switch
- Low battery warning



data aquisition App (included)

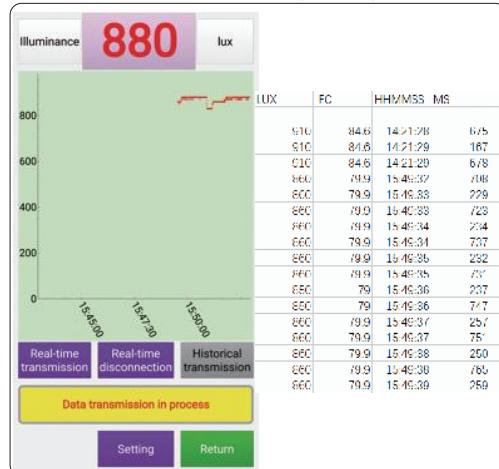

## SPECIFICATION

Measuring range	0.1~350.0Lux	1~3500Lux	10~80000Lux
Resolution	0.1Lux	1Lux	10Lux
Measuring range	0.01~35.00FC	0.1~350.0FC	1~8000FC
Resolution	0.01FC	0.1FC	1FC
Accuracy	$\pm(4\%+10d)$ (d is resolution, calibrated with standard incandescent lamp at color temperature 2856K)		
Photosensor	silicon photodiode with dual filter lenses		
Repeatability	$\pm 2\%$		
Sampling time	0.5s		
Operation environment	32°F~104°F, 0%RH~70%RH		
Storage environment	14°F~122°F, 0%RH~80%RH		
Power supply	1x9V battery		
Dimension(L×W×H)	7.28×2.68×1.50"		
Net weight	0.29lb		

## STANDARD DELIVERY

Main unit	1 pc
9V battery	1 pc