

DIGITAL INSIDE POINT CALIPERS

DATA
OUTPUT

depth stop **6143**
(optional)




1121-150A
type A



1121-150B
type B

- Not waterproof
- Measure groove diameter
- Resolution: .0005"/0.01mm
- Buttons type A: on/off, set, inch/mm, preset (+, -)
- type B: on/off, zero, inch/mm
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: depth stop
(part no. **6143**, for calipers with c=.630")

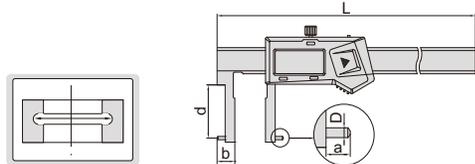

Preset (no need to add the width of the jaws on the reading), with data interface

Part No.	Range	Type	Accuracy	L	a	b	c	d	D	Data output cable (optional)
1121-150A	0.94-6"/24-150mm	A	±.0015"	9.843"	.197"	.472"	.630"	1.102"	.079" DIA	7315-21, 7302-21
1121-1501	1.38-6"/35-150mm	A	±.0020"	9.843"	.236"	.689"	.630"	2.362"	.079" DIA	7315-21, 7302-21
1121-200A	0.98-8"/25-200mm	A	±.0015"	12.205"	.197"	.492"	.630"	1.457"	.079" DIA	7315-21, 7302-21
1121-2001	1.57-8"/40-200mm	A	±.0020"	12.205"	.275"	.787"	.630"	2.756"	.118" DIA	7315-21, 7302-21
1121-300A	1.18-12"/30-300mm	A	±.0030"	16.142"	.197"	.590"	.630"	1.968"	.079" DIA	7315-21, 7302-21
1121-3001A	1.97-12"/50-300mm	A	±.0030"	16.142"	.315"	.984"	.630"	3.031"	.118" DIA	7315-21, 7302-21
1121-500A	1.57-20"/40-500mm	A	±.0030"	26.772"	.197"	.787"	.945"	3.543"	.118" DIA	7315-22, 7302-22
1121-5001	2.36-20"/60-500mm	A	±.0030"	26.772"	.394"	1.181"	.945"	4.724"	.118" DIA	7315-22, 7302-22
1121-5002	3.15-20"/80-500mm	A	±.0030"	26.772"	.630"	1.575"	.945"	5.905"	.118" DIA	7315-22, 7302-22

Preset (no need to add the width of the jaws on the reading), built-in wireless (receiver part no. 7315-2/3/6/7/8/9 is required)

Part No.	Range	Type	Accuracy	L	a	b	c	d	D
1121-150AWL	0.94-6"/24-150mm	A	±.0015"	9.843"	.197"	.472"	.630"	1.102"	.079" DIA
1121-1501WL	1.38-6"/35-150mm	A	±.0020"	9.843"	.236"	.689"	.630"	2.362"	.079" DIA
1121-200AWL	0.98-8"/25-200mm	A	±.0015"	12.205"	.197"	.492"	.630"	1.457"	.079" DIA
1121-2001WL	1.57-8"/40-200mm	A	±.0020"	12.205"	.275"	.787"	.630"	2.756"	.118" DIA
1121-300AWL	1.18-12"/30-300mm	A	±.0030"	16.142"	.197"	.590"	.630"	1.968"	.079" DIA
1121-3001AWL	1.97-12"/50-300mm	A	±.0030"	16.142"	.315"	.984"	.630"	3.031"	.118" DIA
1121-500AWL	1.57-20"/40-500mm	A	±.0030"	26.772"	.197"	.787"	.945"	3.543"	.118" DIA
1121-5001WL	2.36-20"/60-500mm	A	±.0030"	26.772"	.394"	1.181"	.945"	4.724"	.118" DIA
1121-5002WL	3.15-20"/80-500mm	A	±.0030"	26.772"	.630"	1.575"	.945"	5.905"	.118" DIA

No preset (need to add the width of the jaws on the reading)

Part No.	Range	Type	Accuracy	L	a	b	c	d	D
1121-150B	1.97-6"/50-150mm	B	±.0025"	10.630"	.315"	.984"	.787"	3.543"	.118" DIA
1121-200B	2.36-8"/60-200mm	B	±.0025"	12.598"	.394"	1.181"	.787"	3.927"	.118" DIA
1121-300B	2.36-12"/60-300mm	B	±.0030"	16.535"	.394"	1.181"	.787"	4.331"	.118" DIA