



ATTENTION: NOT SUITABLE FOR
 .00005", .0001" OR 0.001MM DIAL INDICATORS

BORE GAGES

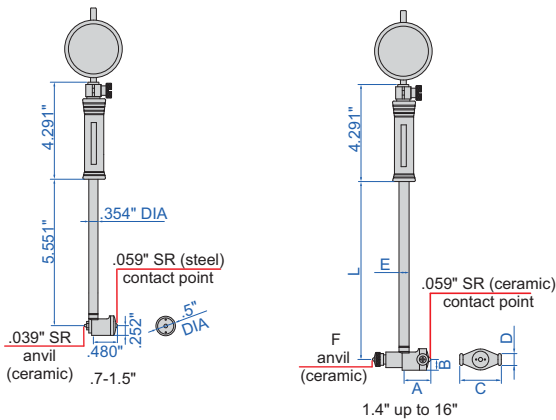


- Optional accessory: setting ring (part no. 6313), long handle (part no. 7351), bore gage setter

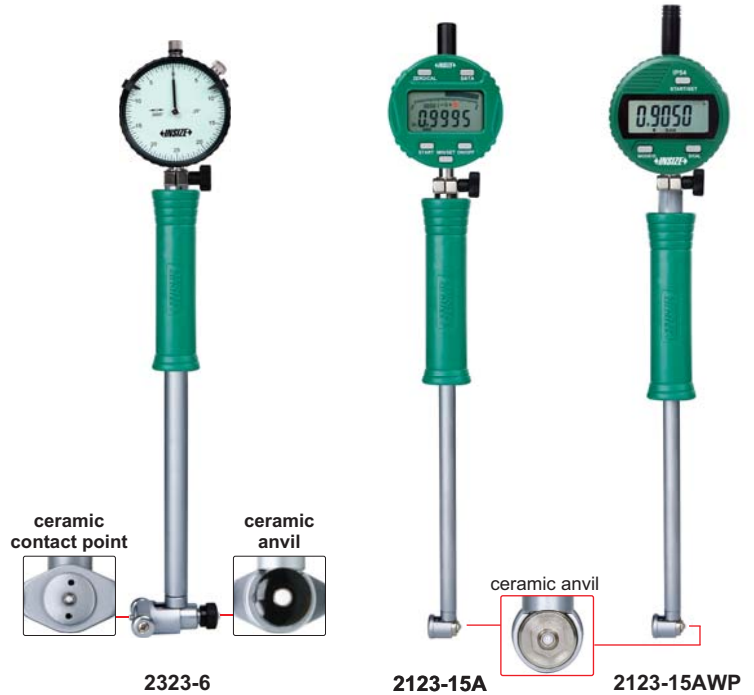

Range	A	B	C	D (DIA)	E (DIA)	F	L
1.4-2.4"	.866"	.354"	1.063"	.512"	.504"	.079" R	5.551"
2-6"	1.024"	.354"	1.378"	.512"	.504"	.079" R	5.551"
6-10"	2.224"	.512"	2.933"	.591"	.571"	.079" R	9.488"
10-16"	3.406"	.591"	3.996"	.591"	.571"	.098" R	9.488"

With dial indicator


Part No.	Range	Indicator	Accuracy	Repeatability
2323-15	.7-1.5"	dial indicator, range .25", graduation .0005"	±.00075"	.00015"
2323-24	1.4-2.4"		±.0009"	.00015"
2323-6	2-6"		±.0009"	.00015"
2323-10	6-10"		±.0009"	.00015"
2323-16	10-16"		±.0009"	.00015"

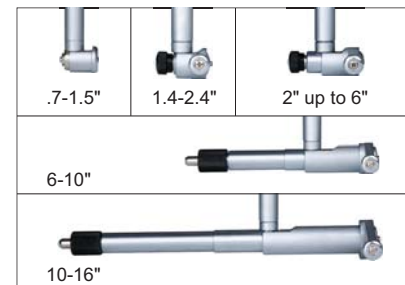

With digital indicator

(data output cable part no. 7315-50M page 5, 7302-40M page 13, optional)


Part No.	Range	Indicator	Accuracy	Repeatability
2123-15A	.7-1.5"	digital indicator, part no. 2108-10EF, range .5"/12.7mm, resolution .0001"/0.002mm (can switch to .0005"/0.01mm)	±.00075"	.0001"
2123-24A	1.4-2.4"		±.0009"	.0001"
2123-6A	2-6"		±.0009"	.0001"
2123-10A	6-10"		±.0009"	.0001"
2123-16A	10-16"		±.0009"	.0001"

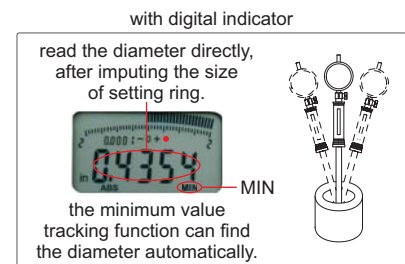

With waterproof digital indicator


(data output cable part no. 7315-50M page 5, 7302-40M page 13, optional)

Part No.	Range	Indicator	Accuracy	Repeatability
2123-15AWP	.7-1.5"	waterproof digital indicator, part no. 2137-10EF, range .5"/12.7mm, dust/waterproof IP54, resolution .0001"/0.002mm (can switch to .0005"/0.01mm)	±.00075"	.0001"
2123-24AWP	1.4-2.4"		±.0009"	.0001"
2123-6AWP	2-6"		±.0009"	.0001"
2123-10AWP	6-10"		±.0009"	.0001"
2123-16AWP	10-16"		±.0009"	.0001"

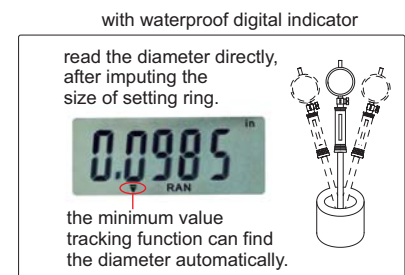

ATTENTION: NOT SUITABLE FOR
.00005", .0001" OR 0.001MM DIAL INDICATORS

BORE GAGES FOR SMALL HOLES

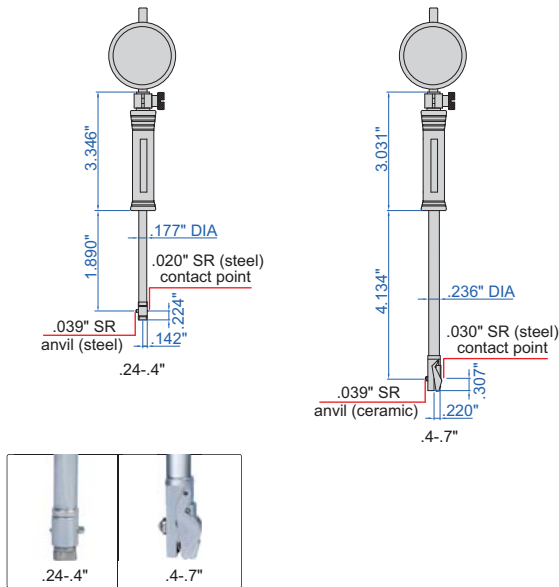

2323-04



2123-07A

2123-07AWP

- Optional accessory:
setting ring (part no. 6313), bore gage setter


With dial indicator

Part No.	Range	Indicator	Accuracy	Repeatability
2323-04	.24-.4"	dial indicator, range .25", graduation .0005"	±.00075"	.00015"
2323-07	.4-.7"		±.00075"	.00015"

With digital indicator (data output cable part no. 7315-50M page 5, 7302-40M page 13, optional)

Part No.	Range	Indicator	Accuracy	Repeatability
2123-04A	.24-.4"	digital indicator, part no. 2108-10EF, range .5"/12.7mm, resolution .0001"/0.002mm (can switch to .0005"/0.01mm)	±.00075"	.0001"
2123-07A	.4-.7"		±.00075"	.0001"

with digital indicator

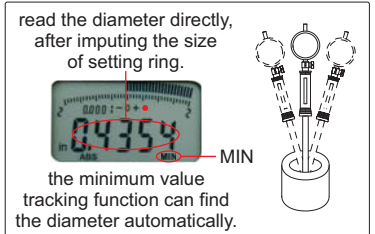

With waterproof digital indicator (data output cable part no. 7315-50M page 5, 7302-40M page 13, optional)

Part No.	Range	Indicator	Accuracy	Repeatability
2123-04AWP	.24-.4"	waterproof digital indicator, part no. 2137-10EF, range .5"/12.7mm, dust/waterproof IP54, resolution .0001"/0.002mm (can switch to .0005"/0.01mm)	±.00075"	.0001"
2123-07AWP	.4-.7"		±.00075"	.0001"

with waterproof digital indicator

