


# BRINELL INDENTATION HARDNESS MEASURING SYSTEMS

PRECISE IDENTIFICATION

SMART VOICE ASSISTANT

measurement software (included)

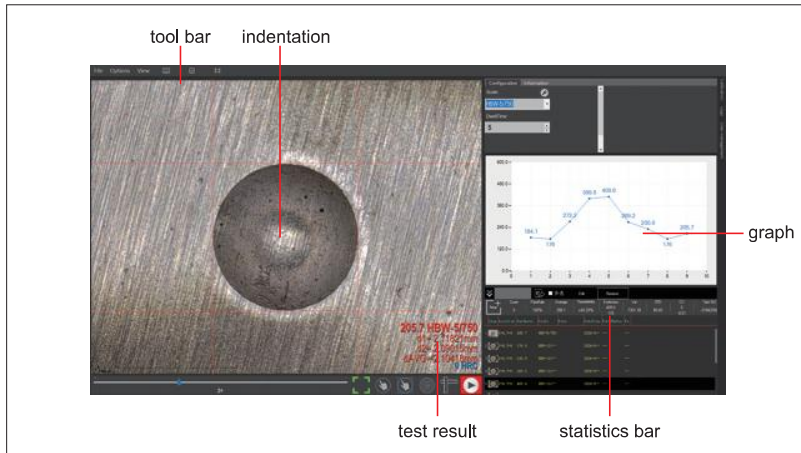

HDT-MB425

- Indentation recognition is highly accurate, capable of handling most complex surface conditions
- Measurement results can be automatically generated including average, maximum and minimum values, standard deviation, etc.
- Measured hardness values can be announced by voice, and the software also supports voice-controlled automatic measurement
- Measurement results can be converted to HRA, HRB, HRC, HV, HK, HBW, HR15N, HR30N, HR45N, HR15T, HR30T, HR45T, Rm etc.
- Built-in software dongle, not easy to lose
- Software interface offers multiple layout modes and also supports customizable layout
- Measurement results can be sent to Word or Excel

application (complex surface condition test case)



standard base (included)



magnetic base (included)



slender base (included)

## SPECIFICATION

Part No.	HDT-MB424	HDT-MB425	HDT-MB426	HDT-MB427	HDT-MB428
Type	Brinell	Brinell	hammer Brinell	shear pin Brinell	Brinell, hammer brinell, shear pin brinell
Measurement method of Indentation	manual	automatic	automatic	automatic	automatic
Range	10~650HBW		/		
Max. measuring diameter	.24"				
Accuracy	±2%				
Repeatability	±1%				
Pixel	3M				
Dimension (L×W×H)	4.13×2.76×7.87"				
Net weight	1.37lb				

## STANDARD DELIVERY

Camera	1 pc
Software	1 pc
USB cable	1 pc
Standard base	1 pc
Magnetic base	1 pc
Slender base	1 pc

## OPTIONAL ACCESSORY

OFFICE software	7313-OFFICE
Tablet computer	7313-4