



OUTSIDE DIAMETER MEASURING INSTRUMENTS

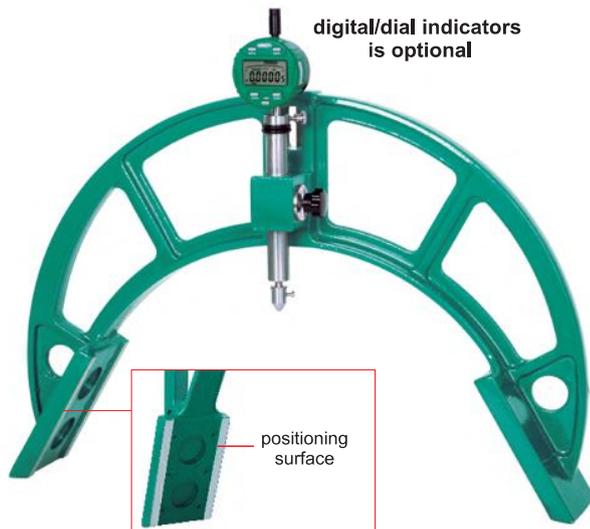

2716-500E

- The frame is made of aluminum magnesium alloy with light weight and high strength
- Optional accessory: .0005" or .00005" digital/dial indicators

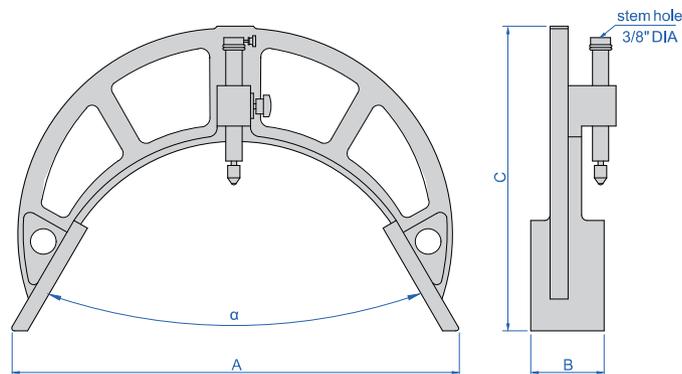

Part No.	Range (diameter)	Repeatability	α	A	B	C	Weight
2716-60E	.7-2.3"	.0005"	60°	5.512"	2.362"	6.299"	2.20lb
2716-120E	2.3-4.7"	.0005"	60°	6.535"	2.559"	6.378"	3.31lb
2716-200E	4.7-8"	.0005"	60°	8.858"	2.756"	8.976"	4.41lb
2716-300E	8-12"	.0005"	60°	12.992"	3.150"	10.315"	5.51lb
2716-400E	12-16"	.0005"	60°	15.945"	3.150"	11.929"	8.82lb
2716-500E	16-20"	.0005"	60°	19.449"	3.150"	13.386"	11.02lb
2716-600E	20-24"	.0005"	60°	23.386"	3.150"	15.669"	13.23lb
2716-700E	24-28"	.0005"	60°	26.969"	3.150"	17.559"	16.53lb
2716-800E	28-32"	.0005"	60°	30.394"	3.150"	18.858"	19.84lb
2716-900E	32-36"	.0005"	60°	33.858"	3.150"	20.472"	22.05lb
2716-1000E	36-40"	.0005"	60°	37.402"	3.150"	22.047"	25.35lb
2716-1100E	40-44"	.0005"	60°	40.748"	3.543"	22.638"	28.66lb
2716-1200E	40-48"	.0005"	83.62°	37.795"	3.937"	18.110"	26.46lb
2716-1300E	44-52"	.0005"	83.62°	39.370"	3.937"	19.094"	29.76lb
2716-1400E	48-56"	.0005"	83.62°	43.307"	3.937"	20.157"	33.07lb
2716-1600E	56-64"	.0005"	83.62°	49.606"	3.937"	21.260"	37.48lb
2716-1800E	64-72"	.0005"	83.62°	57.480"	3.937"	22.441"	41.89lb
2716-2000E	72-80"	.0005"	83.62°	64.764"	3.937"	23.819"	46.30lb