

# WATERPROOF DIGITAL OUTSIDE MICROMETERS (WITH DATA OUTPUT)



data output interface  
on the back



data output signal light

**3101-25E**

- Resolution .00005"/0.001mm (resolution of **3101-275E** and **3101-300E** is .0001"/0.001mm)
- IP65 dust/waterproof
- Button function: on/off, set, inch/mm, data transmit
- Automatic power off
- Carbide measuring faces
- Supplied with spherical anvil
- Setting standards are included (except 0-1"/0-25mm)
- Optional accessory: data output cable (part no. **7315-31**, **7302-31**)

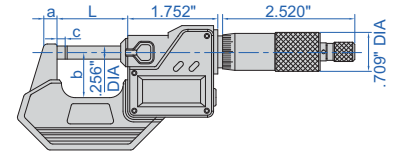

### Individual (ratchet stop type)

Part No.	Range	Accuracy	L	a	b	c
<b>3101-25E *</b>	0-1"/0-25mm	±.00010"	1.358"	.236"	.984"	.118"
<b>3101-50E *</b>	1-2"/25-50mm	±.00010"	2.343"	.315"	1.260"	.118"
<b>3101-75E *</b>	2-3"/50-75mm	±.00015"	3.327"	.315"	1.752"	.118"
<b>3101-100E *</b>	3-4"/75-100mm	±.00015"	4.311"	.315"	2.244"	.118"
<b>3101-125E</b>	4-5"/100-125mm	±.00015"	5.315"	.394"	2.756"	.118"
<b>3101-150E</b>	5-6"/125-150mm	±.00015"	6.319"	.394"	3.228"	.118"
<b>3101-175E</b>	6-7"/150-175mm	±.00020"	7.323"	.472"	3.720"	.217"
<b>3101-200E</b>	7-8"/175-200mm	±.00020"	8.327"	.472"	4.213"	.217"
<b>3101-225E</b>	8-9"/200-225mm	±.00020"	9.291"	.906"	5.098"	.217"
<b>3101-250E</b>	9-10"/225-250mm	±.00020"	10.295"	.906"	5.610"	.217"
<b>3101-275E</b>	10-11"/250-275mm	±.0002"	11.299"	.906"	6.102"	.217"
<b>3101-300E</b>	11-12"/275-300mm	±.0002"	12.303"	.906"	6.594"	.217"



### Individual (friction thimble type)

Part No.	Range	Accuracy	L	a	b	c
<b>3101-25FE *</b>	0-1"/0-25mm	±.00010"	1.358"	.236"	.984"	.118"

### Set (ratchet stop type)

Part No.	Range	Micrometers included	Packaging
<b>3101-33E *</b>	0-3"/0-75mm	3101-25E, 3101-50E, 3101-75E	blow mould case
<b>3101-44E *</b>	0-4"/0-100mm	3101-25E, 3101-50E, 3101-75E, 3101-100E	blow mould case
<b>3101-66E</b>	0-6"/0-150mm	3101-25E, 3101-50E, 3101-75E, 3101-100E, 3101-125E, 3101-150E	aluminum box
<b>3101-126E</b>	6-12"/150-300mm	3101-175E, 3101-200E, 3101-225E, 3101-250E, 3101-250E, 3101-300E	aluminum box



**3101-33E**



**3101-66E**

\* Supplied with manufacturer inspection certificate