


# ZOOM STEREO MICROSCOPES (WITH UNIVERSAL STAND)



**5106-M40 (with stand type A)**

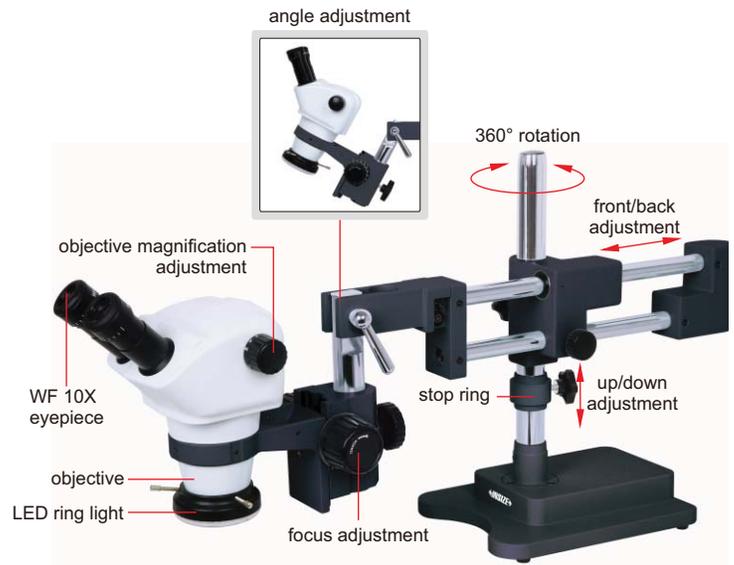

**5106-M50 (with stand type B)**

## SPECIFICATION

Part No.	5106-M40	5106-M40T	5106-M50	5106-M50T
Stand	type A		type B	
Optical tube	binocular	trinocular	binocular	trinocular
Eyepiece (wide field)	10X (view field .87" DIA)			
Objective	0.8X~5X (zoom)			
Zoom ratio	1:6.3			
Pupil distance	2.17~2.95"			
Diopter adjustment	±5 diopter (two eyepieces)			
Working distance of objective	4.53"			
Max. workpiece height	11.81"			
Illumination	adjustable reflected LED ring light			
Power supply	power adapter			
Dimension (L×W×H)	24.02×8.66×16.93"		31.10×9.06×16.93"	
Weight	30.20lb		44.09lb	

## STANDARD DELIVERY

Main unit (with stand)	1 pc
WF10X eyepiece	2 pcs
LED ring light	1 pc
Anti-dust cover	1 pc

## OPTIONAL ACCESSORY

Auxiliary objective	0.5X	ISM-ZS50-OB05X *
	2X	ISM-ZS50-OB2X
Eyepiece	10X dividing eyepiece (graduation 0.1mm/.004")	ISM-ZS50-EPD10X
	WF15X (view field .63" DIA)	ISM-ZS50-EP15X
	WF20X (view field .47" DIA)	ISM-ZS50-EP20X
Adapter sleeve		ISM-ZS30-ADAPTER
0.5X adapter (5106-M40T/M50T)		ISM-MAS-ADAPTER
Digital camera (5106-M40T/M50T) **		ISM-CM20, ISM-CM63

\* 0.5X auxiliary objective must be used with adapter sleeve ISM-ZS30-ADAPTER

\*\* Digital camera must be used with 0.5X adapter ISM-MAS-ADAPTER