

INDUSTRIAL ELECTRONIC BALANCES (BASIC TYPE)


DATA
OUTPUT

- Double weighing pan in stainless steel and plastic
- Weighing, simple counting, taring
- Strain balance sensor
- LCD display, with backlight
- Unit: g, lb, ct, oz
- Overload alarm



printer (optional)

8306-20AD

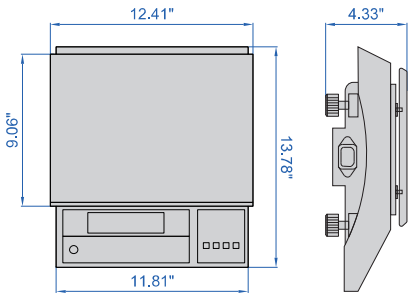

SPECIFICATION

Operation temperature	14~104°F
Operation humidity	≤85% RH
Dimension of pan	12.41×9.06"
Power	rechargeable lead acid battery (6V/4Ah)
Stable reading time	≤2s

Part No.	Maximum weighing	Resolution (d)	Minimum weighing	Verification interval (e)	Number of verification interval (n)	Accuracy (m is load)	Output
8306-10	10kg/22lb	1g/.001lb	20g/.044lb	10g/.01lb	1000	m≤11lb: ±.011lb; m>11lb: ±.022lb	no
8306-15	15kg/33lb	1g/.001lb	20g/.044lb	10g/.01lb	1500	m≤11lb: ±.011lb; m>11lb: ±.022lb	
8306-20	20kg/44lb	1g/.001lb	20g/.044lb	10g/.01lb	2000	m≤11lb: ±.011lb; m>11lb: ±.022lb	
8306-30	30kg/66lb	1g/.001lb	20g/.044lb	10g/.01lb	3000	m≤11lb: ±.011lb; 11lb<m≤44lb: ±.022lb; m>44lb: ±.033lb	
8306-5A	5kg/11lb	0.1g/.0001lb	5g/.011lb	1g/.001lb	5000	±.0011lb	
8306-10A	10kg/22lb	0.1g/.0001lb	5g/.011lb	1g/.001lb	10000	m≤11lb: ±.0011lb; m>11lb: ±.0022lb	
8306-15A	15kg/33lb	0.1g/.0001lb	5g/.011lb	1g/.001lb	15000	m≤11lb: ±.0011lb; m>11lb: ±.0022lb	
8306-20A	20kg/44lb	0.1g/.0001lb	5g/.011lb	1g/.001lb	20000	m≤11lb: ±.0011lb; m>11lb: ±.0022lb	RS232
8306-10D	10kg/22lb	1g/.001lb	20g/.044lb	10g/.01lb	1000	m≤11lb: ±.011lb; m>11lb: ±.022lb	
8306-15D	15kg/33lb	1g/.001lb	20g/.044lb	10g/.01lb	1500	m≤11lb: ±.011lb; m>11lb: ±.022lb	
8306-20D	20kg/44lb	1g/.001lb	20g/.044lb	10g/.01lb	2000	m≤11lb: ±.011lb; m>11lb: ±.022lb	
8306-30D	30kg/66lb	1g/.001lb	20g/.044lb	10g/.01lb	3000	m≤11lb: ±.011lb; 11lb<m≤44lb: ±.022lb; m>44lb: ±.033lb	
8306-5AD	5kg/11lb	0.1g/.0001lb	5g/.011lb	1g/.001lb	5000	±.0011lb	
8306-10AD	10kg/22lb	0.1g/.0001lb	5g/.011lb	1g/.001lb	10000	m≤11lb: ±.0011lb; m>11lb: ±.0022lb	
8306-15AD	15kg/33lb	0.1g/.0001lb	5g/.011lb	1g/.001lb	15000	m≤11lb: ±.0011lb; m>11lb: ±.0022lb	
8306-20AD	20kg/44lb	0.1g/.0001lb	5g/.011lb	1g/.001lb	20000	m≤11lb: ±.0011lb; m>11lb: ±.0022lb	

OPTIONAL ACCESSORY

RS232 cable	8306-CABLE*
Printer	8306-PRINTER

* Used to connect with computers