


ELECTRONIC ANALYTICAL BALANCES

INSIZE PLUS


HIGH
ACCURACY

DATA
OUTPUT

- Downward-mounted electromagnetic sensor
- Aluminum alloy base, wind shield, three side glass sliding doors
- Zero-setting, weighing, subtracting tare value
- Counting, checking alarm, accumulation, animal scale, percentage display
- Peak (max.) and tracking mode
- Administrator rights
- Recipe database: 99 recipes, up to 20 ingredients per recipe
- LCD display, with backlight
- Data output
- Automatic power off
- Unit: g, mg, ct, oz, ozt, dwt, mlb, GN, tj, gj, mo
- With a hook at the bottom

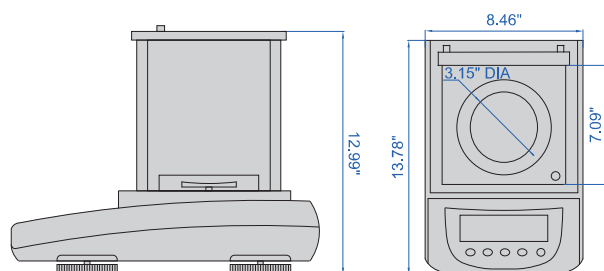

8312-220

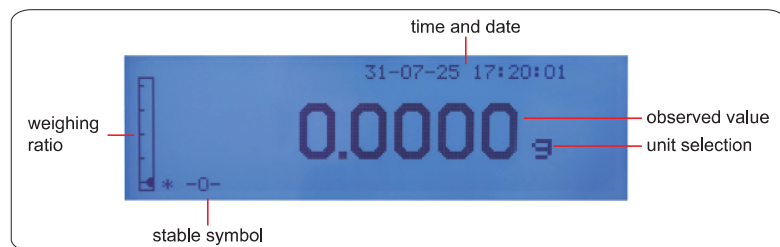

weighing test Interface

OPTIONAL ACCESSORY

Portable ioniser	8312-PI
Printer	8306-PRINTER

SPECIFICATION

Part No.	8312-120	8312-220	8312-120A	8312-220A	8312-310A
Calibration method	external calibration		internal calibration		
Maximum weighing	120g/600ct	220g/1100ct	120g/600ct	220g/1100ct	310g/1550ct
Minimum weighing	10mg/.05ct	10mg/.05ct	10mg/.05ct	10mg/.05ct	10mg/.05ct
Resolution (d)	0.1mg/.0005ct	0.1mg/.0005ct	0.1mg/.0005ct	0.1mg/.0005ct	0.1mg/.0005ct
Verification interval (e)	1mg/.005ct	1mg/.005ct	1mg/.005ct	1mg/.005ct	1mg/.005ct
Repeatability	±0.1mg/.0005ct				
Linearity	±0.3mg/.0015ct				
Stabilization time	2.5s				
Output	RS232				
Weighing pan size	3.15" DIA				
Operation temperature	64.4~73.4°F				
Operation humidity	20~85%RH				
Power supply	power adapter (24V/1A)				
Dimension (L×W×H)	13.78×8.46×13.58"				



portable ioniser (optional)



printer (optional)