


## DIGITAL SOUND LEVEL METER PART NO. 9351-130

DATA  
OUTPUT

- Automatically select best range: 30~80dB, 40~90dB, 50~100dB, 60~110dB, 70~120dB, 80~130dB
- Over range indicator
- Real time, average, maximum modes
- Memory 16000 measurement values
- AC signal output: 0.707 Vrms at FS, impedance approx. 600Ω
- DC signal output: 10mV/dB, impedance approx. 100Ω
- Automatic power off

### SPECIFICATION

|                     |                                    |
|---------------------|------------------------------------|
| Measuring range     | 30~130dB                           |
| Accuracy            | ±2dB                               |
| Resolution          | .1dB                               |
| Sampling time       | .5s for digital, .05s for analogue |
| Response time       | fast: 125ms, slow: 1s              |
| Frequency           | 30Hz~8KHz                          |
| Frequency weighting | A/C                                |
| Microphone          | electret condenser type            |
| Output              | RS232, AC/DC                       |
| Power supply        | 6×AAA batteries                    |
| Dimension           | 10.43×3.15×2.71"                   |
| Weight              | .7lb                               |

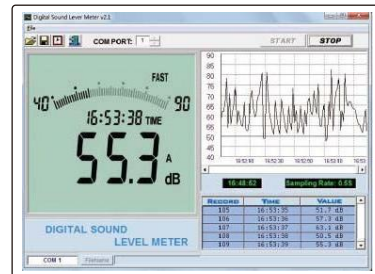

software (included), display measurement values and graph, save and output data

### STANDARD DELIVERY

|                          |       |
|--------------------------|-------|
| Main unit                | 1 pc  |
| RS232 cable and software | 1 pc  |
| Output connector         | 1 pc  |
| Battery (AAA)            | 6 pcs |