

OXYGEN/NITROGEN/HYDROGEN ANALYZERS (STANDARD TYPE)





ELA-ONH35-U

- Widely used in iron, non-ferrous metals, new materials, magnetic materials, new energy, research institution, etc.
- Can analyze oxygen, nitrogen, and hydrogen in alloys, lithium battery materials, powders, rare earths, neodymium-iron-boron materials, etc.
- Can analyze the oxygen in various oxide and the nitrogen in various nitride
- Test method can be established for different types of sample
- Thermal extraction is used to analyze the content of residual hydrogen in the sample
- Featured software with linearization and self-diagnostic function
- Automatic switching of channel from low to high content

SPECIFICATION

Part No.	ELA-O35-U	ELA-N35-U	ELA-ON35-U	ELA-ONH35-U	ELA-H35-U	ELA-OH35-U
Analysis element	0	N	O, N	O, N, H	Н	O, H
Analysis range ***	O: .1ppm~.5%*	N: .1ppm~50%	O: .1ppm~.5% * N: .1ppm~50%	O: .1ppm~.5% * N: .1ppm~50% H: .1ppm~.5%	H: .1ppm~.5%	O: .1ppm~.5% H: .1ppm~.5%
Carrier gas	Ar (≥99.9995%)	He (≥99.9995%)			N2 (≥99.9995%)	
Motive gas	N2 (≥99.9995%)					
Accuracy	O: 1ppm or RSD≤1%, N: 1ppm or RSD≤1%, H: .2ppm or RSD≤2%					
Sensitivity	.01ppm					
Pulse furnace	current: 0~1500A, the maximum temperature can reach 3000°C					
Analysis time	3 minutes					
Sample weighing	recommended 1g, can be changed according to the sample content					
Work environment	64~84°F, ≤80%RH					
Power supply	AC 110V, 50Hz/60Hz					
Dimensions (W×D×H)	27.56×43.31×26.77"					
Weight	396.83lb					

^{*}Can be customized to extend the analysis range of oxygen: .1ppm~20%

^{**}The analysis range can be expanded by changing the weight


STANDARD DELIVERY

Main unit	1 pc	
Computer	1 pc	
Analysis software	1 pc	
Water circulate chiller	1 pc	
Electronic analytical balance (8310-120M)	1 pc	
Standard sample (ELA-ONH35-BYST)	1 pc	
Electrode brush (ELA-ONH35-BR)	1 pc	
Copper brush (ELA-ONH35-CR)	1 pc	
Single crucible (ELA-ONH35-DCB25)	100 pcs	
Reusable crucible (ELA-ONH35-FCB14)	50 sets	
Tin sheet (ELA-ONH35-TS100)	1 pc	
Copper oxide (ELA-ONH35-CU50)	1 pc	
Soda lime (ELA-ONH35-SL)	1 pc	
Printer	1 pc	
Voltage regulator	1 pc	
Tool	1 set	

OPTIONAL DELIVERY

Quartz tube (.59"DIA ×8.14")	ELA-ONH35-QT25
Nickel basket (200 pcs)	ELA-ONH35-NB200
Nickel foil (.22lb)	ELA-ONH35-NF100
Ultrasonic cleaner	ELA-ONH35-UC150

ANALYSIS CURVE

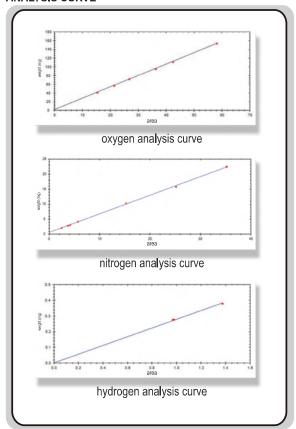

ANALYSIS SOFTWARE (INCLUDED)

