


# INTERCHANGEABLE HEAD BLUETOOTH DIGITAL TORQUE WRENCHES (KEYBOARD SIGNAL)




**OPTIONAL ACCURACY:**  
CLOCKWISE:  $\pm 1\%$   
COUNTER-CLOCKWISE:  $\pm 2\%$

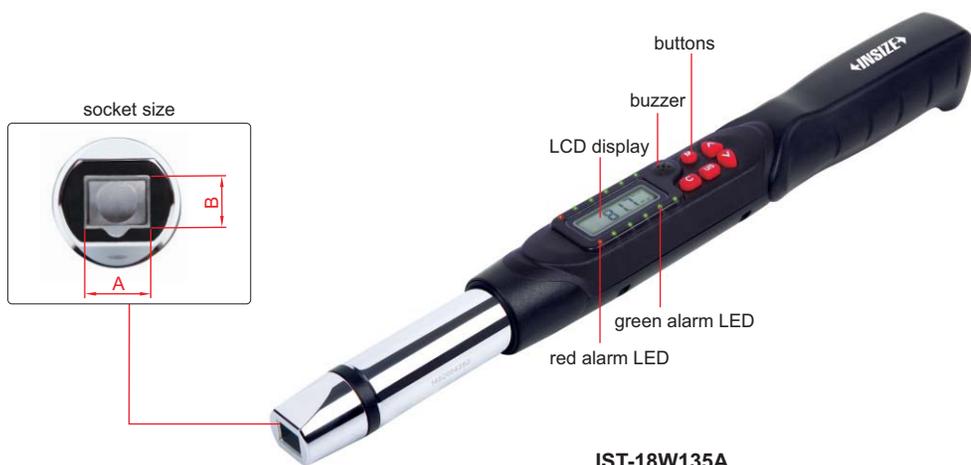

**IST-18W135A**


## Torque wrenches:

- Unit: N.m, in.lb, ft.lb, kg.cm
- Clockwise and counter-clockwise operation
- Peak and track working modes
- Can set tolerance with judgement in peak working mode
- 9 target torque values can be set, with audible and visible alarm:
  - Green LED light on and buzzer sounds when torque value is 80%~99.5% of target torque
  - Both green and red LED light on and buzzer sounds when torque value is over 99.5% of target torque
- Power off in 2 minutes automatically without any operations
- Non-slip grip handle
- With overload record (once the torque reaches 110% of the maximum range)

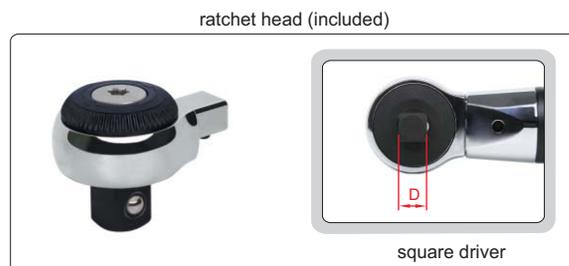

## Data transmission:

- Built-in Bluetooth 4.0 module, which can be connected with computers (with Bluetooth function), mobile phones, tablets and other devices
- Keyboard signal, can be transmitted to Excel, Word, TXT
- Transmission distance is 10 meters (no obstacles, no electromagnetic interference)
- Bluetooth connection and disconnection are respectively shown by indicator lights

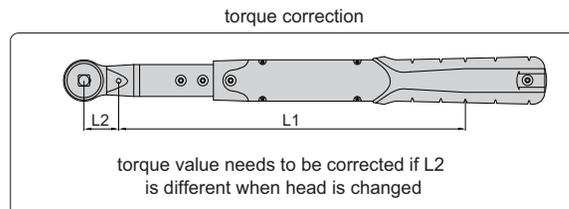

## SPECIFICATION

Part No.	IST-18W30A	IST-18W135A	IST-18W200A	IST-18W340A
Range	53.1~265.5in.lb	239~1195in.lb	354~1770in.lb	602~3009in.lb
Accuracy	clockwise	$\pm 2\%$		
	counter-clockwise	$\pm 3\%$		
Resolution	0.1in.lb	1in.lb	1in.lb	1in.lb
Socket size (A×B)	.47×.35"	.47×.35"	.71×.55"	.71×.55"
Arm length (L1)	10.74"	11.33"	15.01"	19.73"
Power supply	2xAA batteries, for 110 hours working			
Weight	3.09lb	3.46lb	4.78lb	5.11lb

## RATCHET HEAD (INCLUDED) SPECIFICATION

Part No. of torque wrench	IST-18W30A	IST-18W135A	IST-18W200A	IST-18W340A
Square driver (D)	1/4"	3/8"	1/2"	1/2"
Length (L2)	1.14"	1.14"	1.57"	1.57"

## STANDARD DELIVERY

Torque wrench	1 pc
Ratchet head	1 pc

## OPTIONAL ACCESSORY

Calibration cable	IST-W-CABLE
Interchangeable head	refer to details



**RATCHET HEAD (optional)**

Part No.	Square driver (D)	Applicable wrenches
IST-2W-R1	1/4"	IST-18W30A
IST-2W-R2	3/8"	IST-18W135A
IST-2W-R3	1/2"	IST-18W135A
IST-2W-R4	1/2"	IST-18W200A IST-18W340A

**ADJUSTABLE SPANNER HEAD (optional)**

Part No.	Open size	Applicable wrenches
IST-2W-A1	5~27mm	IST-18W30A IST-18W135A
IST-2W-A2	5~30mm	IST-18W200A IST-18W340A
IST-2W-A3	10~41mm	



**OPEN END HEAD (optional)**

Part No.	Open size	Applicable wrenches
IST-2W-K1B	1/4"	IST-18W30A IST-18W135A
IST-2W-K5D	5/16"	
IST-2W-K3C	3/8"	
IST-2W-K7D	7/16"	
IST-2W-K1A	1/2"	
IST-2W-K9D	9/16"	
IST-2W-K5C	5/8"	
IST-2W-K11D	11/16"	
IST-2W-K3B	3/4"	
IST-2W-2K1A	1/2"	
IST-2W-2K9D	9/16"	
IST-2W-2K5C	5/8"	
IST-2W-2K11D	11/16"	
IST-2W-2K3B	3/4"	
IST-2W-2K13D	13/16"	
IST-2W-2K7C	7/8"	
IST-2W-2K15D	15/16"	
IST-2W-2K1W	1"	
IST-2W-2K1F	1-1/8"	

**BOX END HEAD (optional)**

Part No.	Open size	Applicable wrenches
IST-2W-M1B	1/4"	IST-18W30A IST-18W135A
IST-2W-M5D	5/16"	
IST-2W-M3C	3/8"	
IST-2W-M7D	7/16"	
IST-2W-M1A	1/2"	
IST-2W-M9D	9/16"	
IST-2W-M5C	5/8"	
IST-2W-M11D	11/16"	
IST-2W-M3B	3/4"	
IST-2W-M13D	13/16"	
IST-2W-M7C	7/8"	